

# Appendix C Calibration Certificates of Monitoring Equipment



## **Enovative Environmental Service Limited**

## REPORT OF EQUIPMENT CALIBRATION

#### **INSTRUMENT DESCRIPTION**

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler and the filter paper is weighted by HOKLAS laboratory.

Instrument: Handheld TSP meter

Brand Name: TSI
Model No.: AM520
Serial No.: 5201735006
Date of Calibration: 01 August, 2019
Date of Next Calibration: 01 August, 2020

#### **ISSUING ORGANISATION**

#### **Address**

Enovative Environmental Service Limited

Flat 23, 6/F, Block C, Goldfield Industrial Centre

1 Sui Wo Road Shatin, N.T. Hong Kong Phone: 852-2242 1020 Fax: 852-3691 9240

Email: info@eno.com.hk

and the sure of the sure

Mr Wong Siu Ho, Thomas Manager



## **Enovative Environmental Service Limited**


Brand Name: TSI Model No.: AM520

Serial No.: 5201735006 HVS No.: A12-TSP-102 HVS Calibration Kit No.: Tisch 1612

Date of Calibration: 01 August, 2019 Date of next Calibration: 01 August, 2020

#### **Calibration Record**

HVS - TSP mg/m3	35.9	43.2	50.1	49.7
TSI AM520	35.5	42.8	49.7	50.4

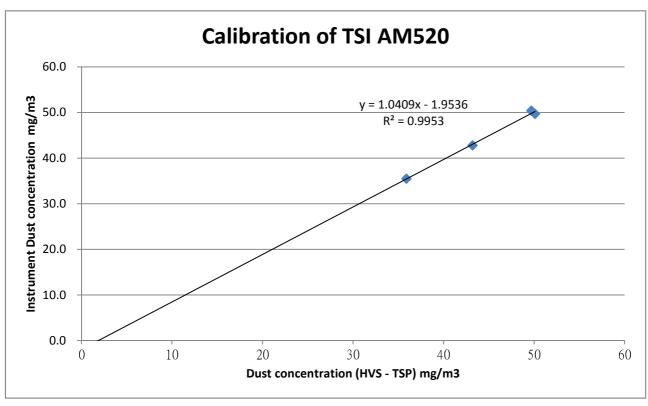

\*\*\* Filter paper being used in the calibration : 203475, 203476, 206020, 206603 Those filter papers are weighted by HOKLAS laboratory (ALS Technichem (HK) Pty Ltd.)

Mr Wong Siu Ho, Thomas

Manager

homas



Certificate No. 903414

Page

of 2 Pages

Customer: Enovative Environmental Service Limited

Address: Flat 6, 3/F, Block E, Wah Lok Industrial Centre, 31-35 Shan Mei Street, Shatin, N.T., Hong Kong.

Order No.: Q91328

Date of receipt

4-Apr-19

**Item Tested** 

Description : Sound Level Calibrator

Manufacturer: Rion

I.D.

: 217656

Model

: NC-74

Serial No.

: 34678506

**Test Conditions** 

Date of Test: 11-Apr-19

**Supply Voltage** 

Relative Humidity: (50 ± 25) %

**Ambient Temperature: Test Specifications** 

Calibration check.

Ref. Document/Procedure: F21, Z02.

**Test Results** 

All results were within the IEC 60942 Class 1 specifications.

 $(23 \pm 3)^{\circ}C$ 

The results are shown in the attached page(s).

Main Test equipment used:

Equipment No.	<u>Description</u>	Cert. No.	Traceable to
S014	Spectrum Analyzer	805025	NIM-PRC & SCL-HKSAR
S240	Sound Level Calibrator	803357	NIM-PRC & SCL-HKSAR
S041	Universal Counter	902477	SCL-HKSAR
S206	Sound Level Meter	805027	SCL-HKSAR

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI), or by reference to a natural constant. The test results apply to the above Unit-Under-Test only

Calibrated by:

Elva Chong

Approved by:

Date:

11-Apr-19

Kin Wong

This Certificate is issued by:

Hong Kong Calibration Ltd.

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.

Tel: 2425 8801 Fax: 2425 8646



Certificate No. 903414

Page 2 of 2 Pages

#### Results:

#### 1. Generated Sound Pressure Level

UUT Nominal Value (dB)	Measured Value (dB)	IEC 60942 Class 1 Spec.
94.0	94.1	± 0.4 dB

Uncertainty:  $\pm 0.2 \text{ dB}$ 

2. Short-term Level Fluctuation: 0.0 dB

IEC 60942 Class 1 Spec. :  $\pm$  0.1 dB

Uncertainty: ± 0.01 dB

#### 3. Frequency

UUT Nominal Value (kHz)	Measured Value (kHz)	IEC 60942 Class 1 Spec.
1	1.001	± 1 %

Uncertainty:  $\pm 3.6 \times 10^{-6}$ 

4. Total Distortion : < 1.1 %

IEC 60942 Class 1 Spec. : < 4 % Uncertainty :  $\pm 2.3 \%$  of reading

Remark: 1. UUT: Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure: 996 hPa.

----- END -----



Certificate No. 903412

Page

of

3 Pages

Customer: Enovative Environmental Service Limited

Address: Flat 6, 3/F, Block E, Wah Lok Industrial Centre, 31-35 Shan Mei Street, Shatin, N.T., Hong Kong.

**Order No.:** Q91328

Date of receipt

4-Apr-19

**Item Tested** 

**Description**: Sound Level Meter

Manufacturer: Rion

I.D.

: 217524

Model

: NL-52

Serial No.

: 00175560

**Test Conditions** 

Date of Test: 11-Apr-19

Supply Voltage

**Ambient Temperature:** 

 $(23 \pm 3)^{\circ}C$ 

Relative Humidity: (50 ± 25) %

**Test Specifications** 

Calibration check.

Ref. Document/Procedure: Z01, IEC 61672.

#### **Test Results**

All results were within the IEC 61672 Type 1 or manufacturer's specification.

The results are shown in the attached page(s).

Main Test equipment used:

Equipment No. Description

Cert. No.

Traceable to

S017

Multi-Function Generator

C190926

SCL-HKSAR

S240

Sound Level Calibrator

803357

NIM-PRC & SCL-HKSAR

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI), or by reference to a natural constant. The test results apply to the above Unit-Under-Test only

Calibrated by

Approved by:

Date:

11-Apr-19

This Certificate is issued by:

Hong Kong Calibration Ltd.

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street, Kwai Chung, NT, Hong Kong.

Tel: 2425 8801 Fax: 2425 8646

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.

Certificate No. 903412

Page 2 of 3 Pages

Results:

#### Acoustical signal test

1. Self-generated noise: 16.2 dBA (Mfr's Spec ≤ 17 dBA)

#### 2. Reference Sound Pressure Level

UUT Setting					
	Frequency	Time Octave		Applied	UUT
Range (dB)	Weighting	Weighting	Filter	Value (dB)	Reading (dB)
20 ~ 130	A	F	OFF	94.0	94.1
		S	OFF		94.1
	С	F	OFF		94.1
	Z	F	OFF		94.2
	A	F	OFF	114.0	114.1
		S	OFF		114.1
	С	F	OFF		114.1
	Z	F	OFF		114.2

IEC 61672 Type 1 Spec. : ± 1.1 dB

Uncertainty: ± 0.1 dB

#### **Electrical signal tests**

## 3. Electrical signal tests of frequency weightings (A weighting)

_		A.,	ID)	IEC 616	72 Tyma 1 6	Snoo
Frequenc	cy	Attenuation (dB)		IEC 61672 Type 1 Spec.		spec.
31.5 H	Iz	-39.6		$-39.4 \text{ dB}, \pm 2 \text{ dB}$		В
63 H	Iz	-26.1		$-26.2 \text{ dB}, \pm 1.5 \text{ dB}$		dB
125 H	Iz	-16.1		- 16.1	$dB, \pm 1.5$	dB
250 H	Iz	-8.6		- 8.6	$dB, \pm 1$	dB
500 H	Iz	-3.2		- 3.2	$dB, \pm 1.4$	dB
1 kH	łz	0.0	(Ref)	0	$dB, \pm 1.1$	dB
2 kH	łz	+1.1		+ 1.2	$dB, \pm 1.6$	dB
4 kH	łz	+0.7		+ 1.0	$dB, \pm 1.6$	dB
8 kH	łz	-1.1		- 1.1 dB,		
16 kH	łz	-8.5		- 6.6 dB, +	$-3.5 \text{ dB} \sim -$	- 17.0 dB

Uncertainty:  $\pm 0.1 \text{ dB}$ 



Certificate No. 903412

Page 3 of 3 Pages

#### 4. Frequency & Time weightings at 1 kHz

4.1 Frequency Weighting (Fast)

4.1 Trequency weighting (1 ust)						
UUT	Applied	UUT	Difference	IEC 61672		
Setting	Value (dB)	Reading (dB)	(dB)	Type 1 Spec.		
A	94.0	94.0 (Ref.)		± 0.4 dB		
С	94.0	94.0	0.0	r i i		
Z	94.0	94.0	0.0			

4.2 Time Weighting (A-weighted)

112 111110 11 0181111118	4.2 Time weighting (T weighted)					
UUT	Applied	UUT	Difference	IEC 61672		
Setting	Value (dB)	Reading (dB)	(dB)	Type 1 Spec.		
Fast	94.0	94.0 (Ref.)		± 0.3 dB		
Slow	94.0	94.0	0.0			
Time-averaging	94.0	94.0	0.0			

Uncertainty: ± 0.1 dB

Remarks: 1. UUT: Unit-Under-Test

- 2. The uncertainty claimed is for a confidence probability of not less than 95%.
- 3. Atmospheric Pressure: 996 hPa.
- 4. Preamplifier model: NH-25, S/N: 65662
- 5. Firmware Version: 1.8
- 6. Power Supply Check: OK
- 7. The UUT was adjusted with the supplied sound calibrator at the reference sound pressure level before the calibration.

----- END -----